



**MTW 400i /FSC/3,5m/45° LED**  
**4,035,951**

# MTW 400i /FSC/3.5m/45°/LED (4,035,951)

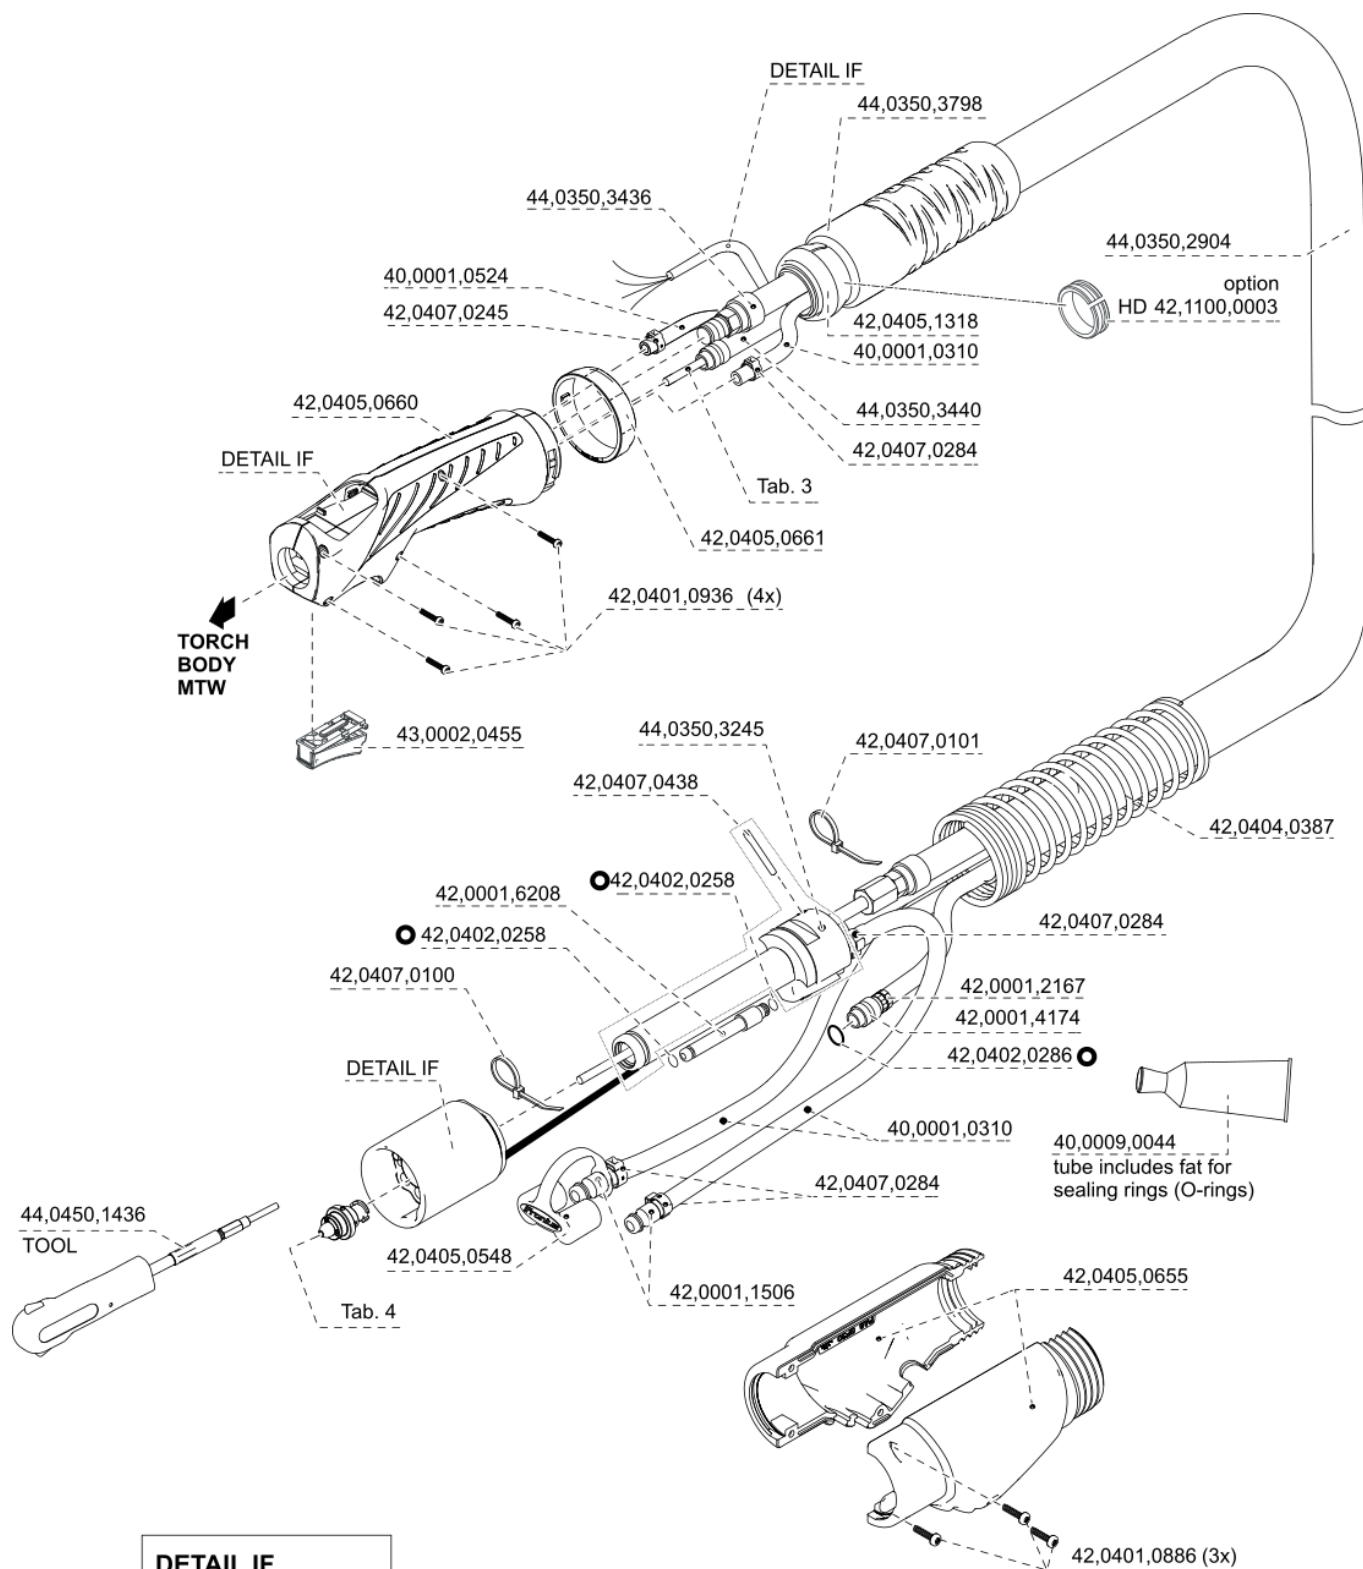


## DETAIL IF

### STANDARD LED




connect

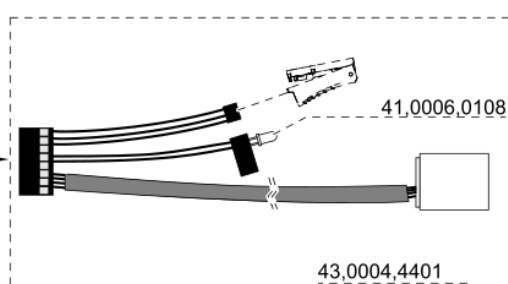


# MTW 400i /FSC/3.5m/45°/LED (4,035,951)


OPT/i T-Handle SET for Push 44,0350,5298

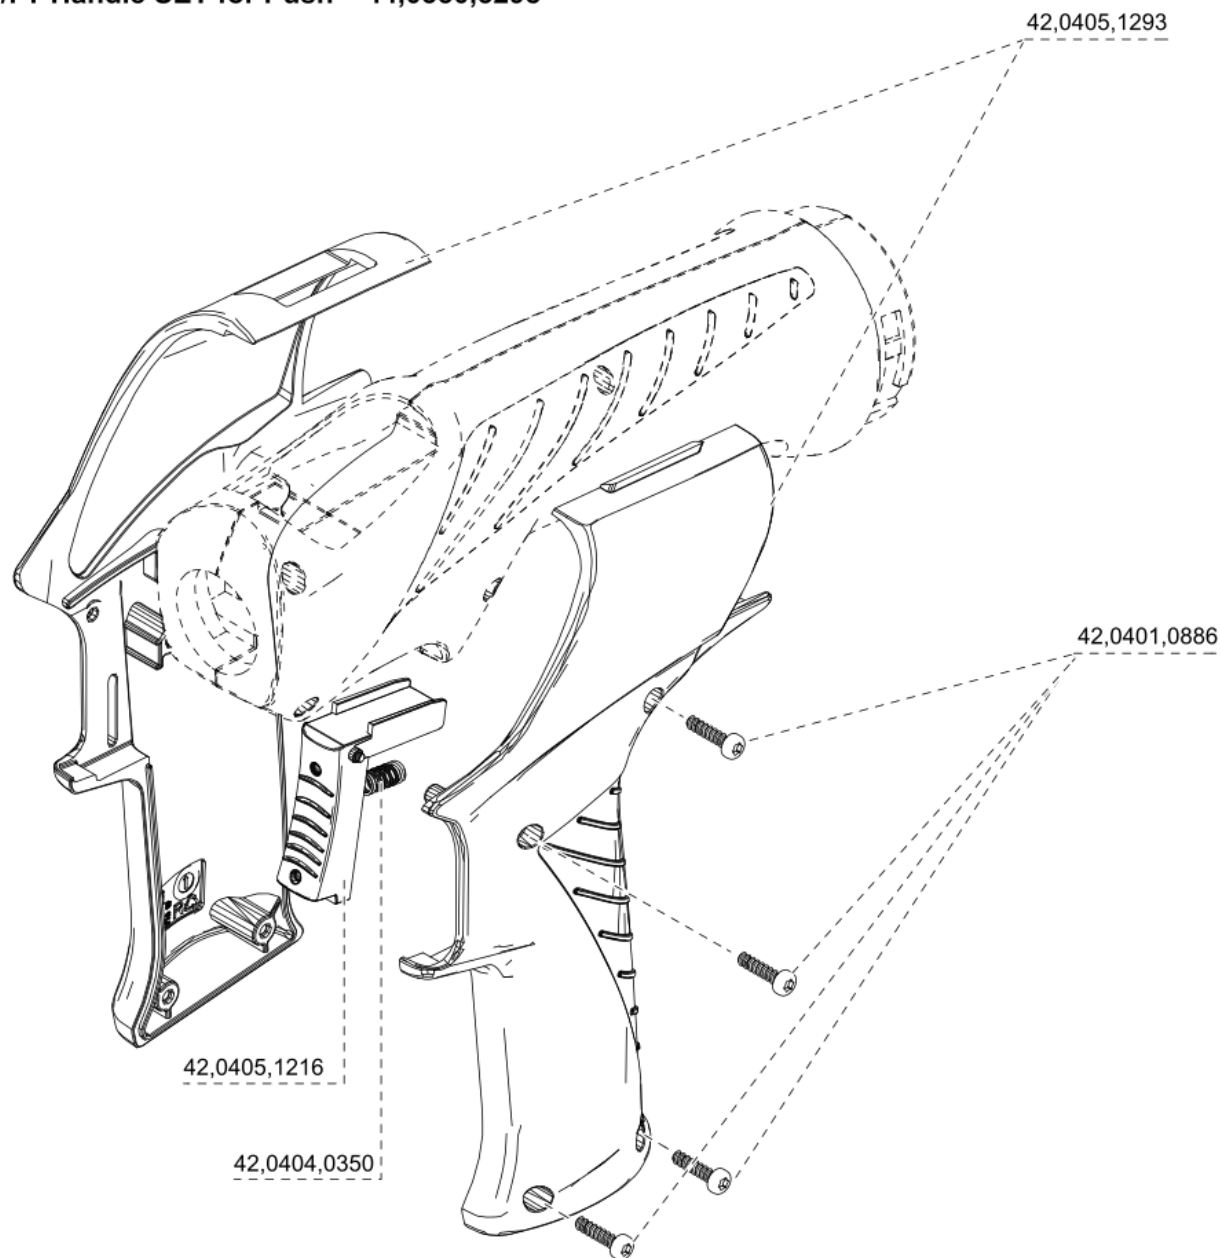

## OPT/i Button extension kit

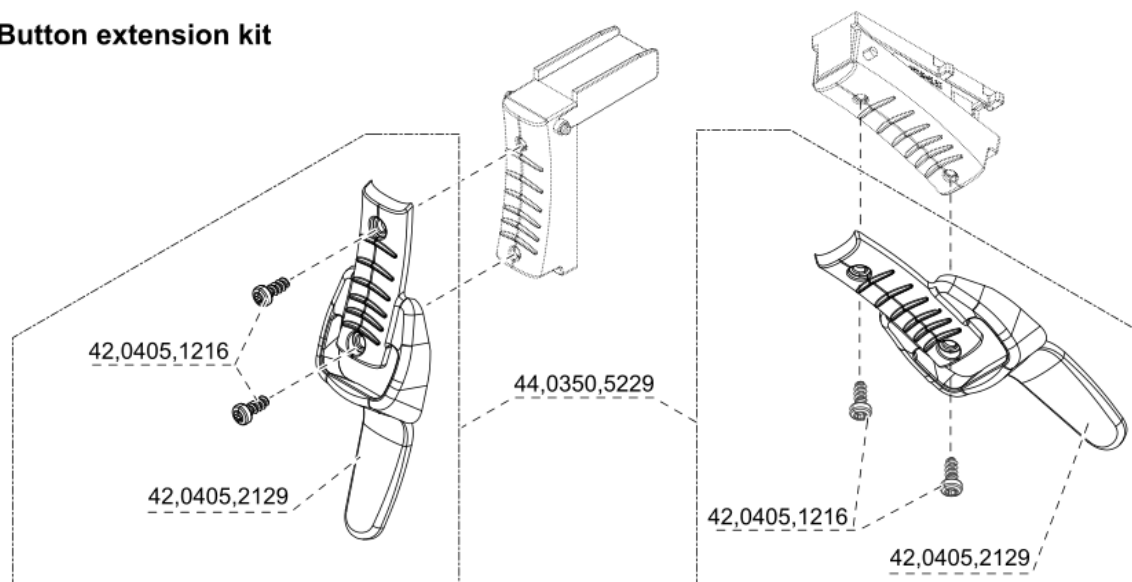

# MTW 400i /FSC/3.5m/45°/LED (4,035,951)

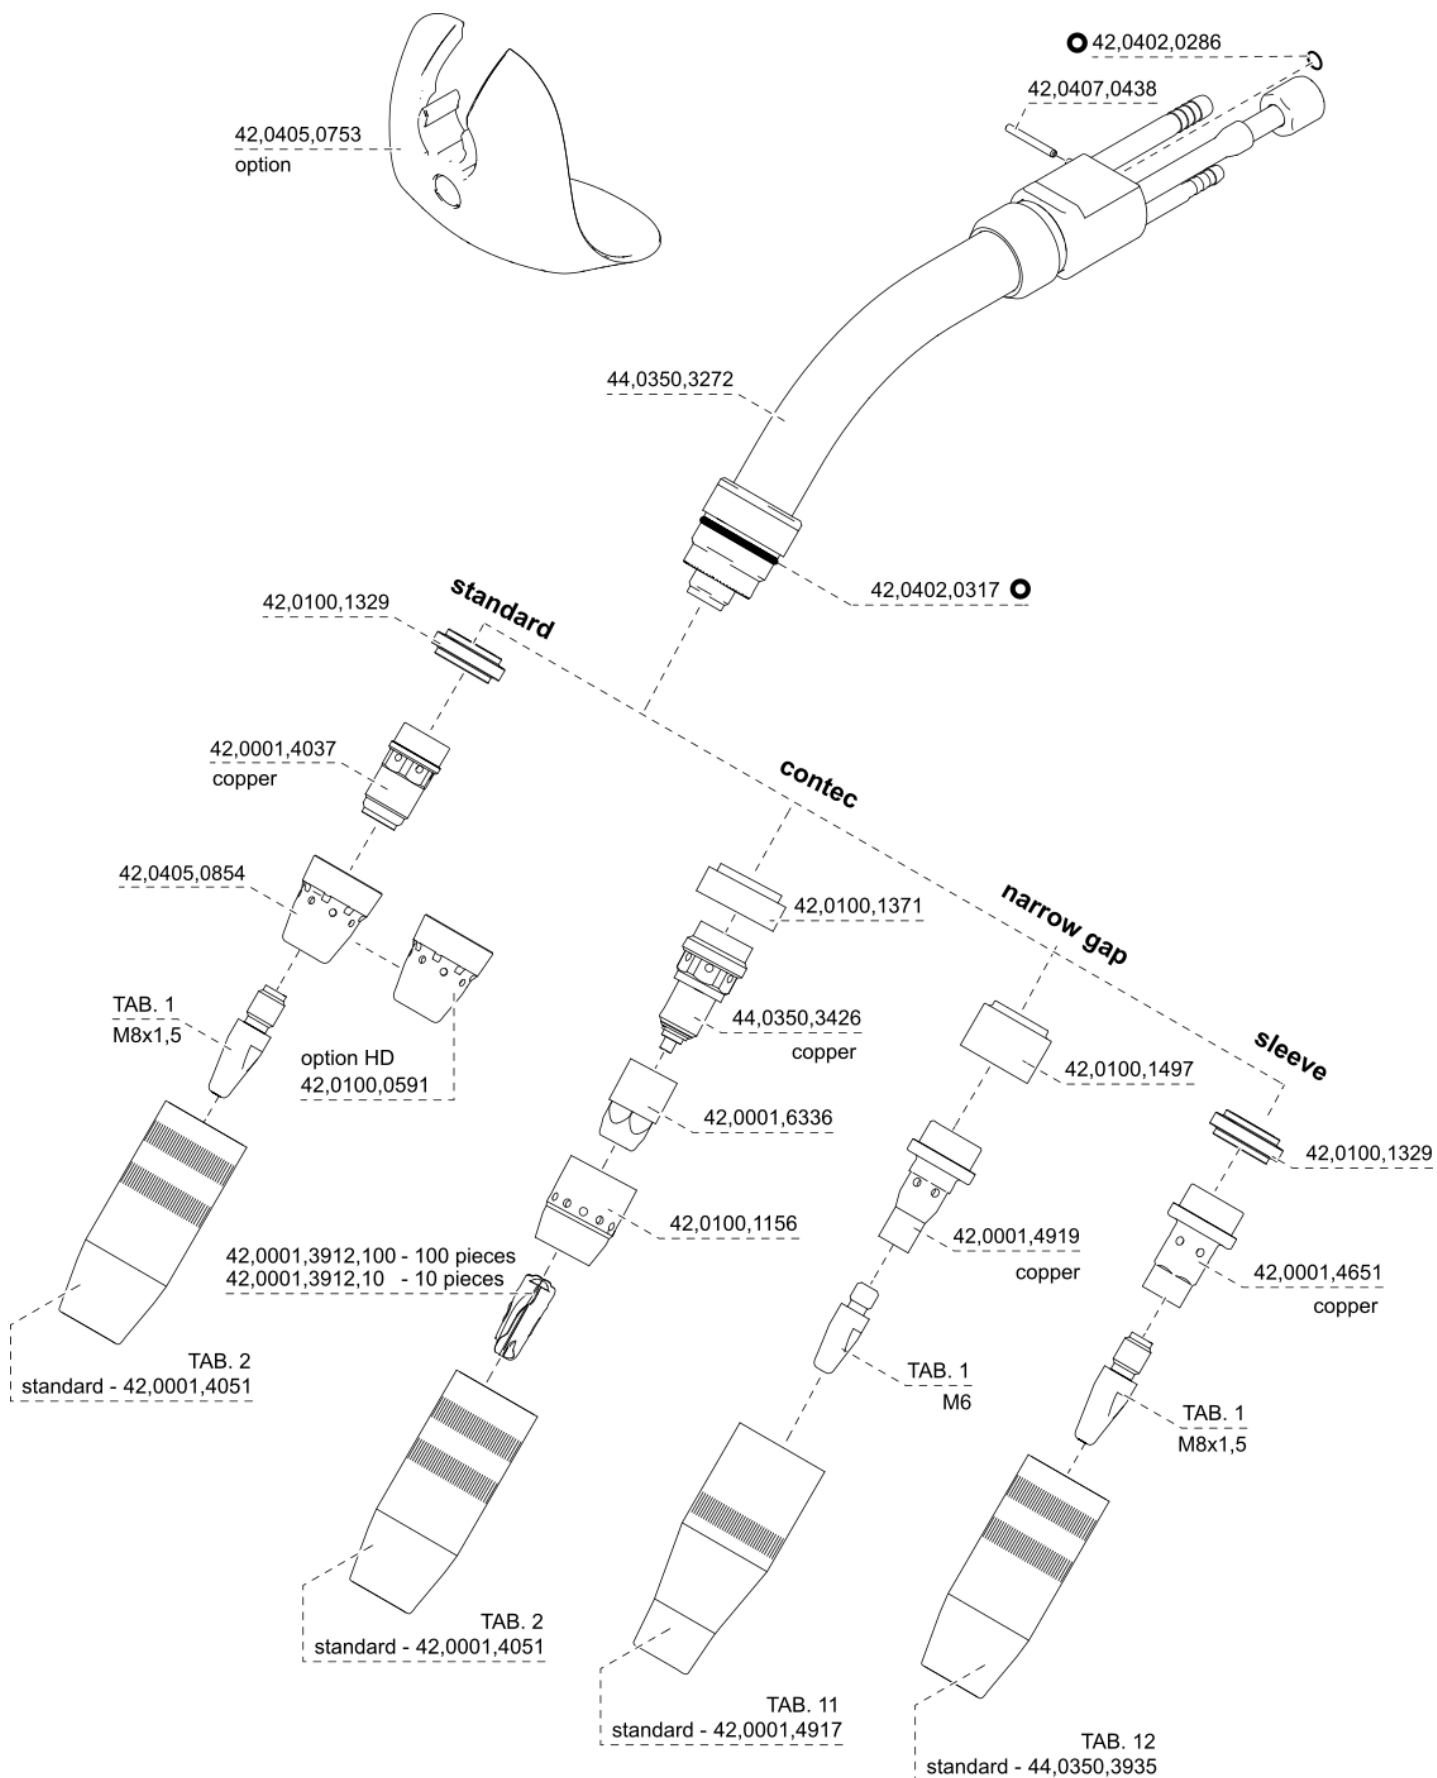

# MTW 400i /FSC/3.5m/45°/LED (4,035,951)

TAB. 1 contact tip

| M6 | CuCrZr | 3 Nm | Ø mm | Ø inch | Part No.        |
|----|--------|------|------|--------|-----------------|
|    |        |      | 0,6  | 0,023  | 42,0001,4928    |
|    |        |      | 0,7  | 0,027  | 42,0001,6524,10 |
|    |        |      | 0,8  | 0,030  | 42,0001,4461,10 |
|    |        |      | 0,9  | 0,035  | 42,0001,4462,10 |
|    |        |      | 1,0  | 0,040  | 42,0001,4463,10 |
|    |        |      | 1,1  | 0,043  | 42,0001,6527,10 |
|    |        |      | 1,2  | 0,045  | 42,0001,4464,10 |
|    |        |      | 1,3  | 0,051  | 42,0001,6529,10 |
|    |        |      | 1,4  | 0,052  | 42,0001,4465,10 |
|    |        |      | 1,5  | 0,059  | 42,0001,6522,10 |
|    |        |      | 1,6  | 0,062  | 42,0001,4466,10 |

TAB. 1 contact tip

| M8x1,5 | CuCrZr | 5 Nm | Ø mm | Ø inch | Part No.        |
|--------|--------|------|------|--------|-----------------|
|        |        |      | 0,7  | 0,027  | 42,0001,6482,10 |
|        |        |      | 0,8  | 0,030  | 42,0001,6464,10 |
|        |        |      | 0,9  | 0,035  | 42,0001,6465,10 |
|        |        |      | 1,0  | 0,040  | 42,0001,6466,10 |
|        |        |      | 1,1  | 0,043  | 42,0001,6483,10 |
|        |        |      | 1,2  | 0,045  | 42,0001,6467,10 |
|        |        |      | 1,3  | 0,051  | 42,0001,6484,10 |
|        |        |      | 1,4  | 0,052  | 42,0001,6468,10 |
|        |        |      | 1,5  | 0,059  | 42,0001,6485,10 |
|        |        |      | 1,6  | 0,062  | 42,0001,6469,10 |
|        |        |      | 1,8  | 0,071  | 42,0001,6470,10 |
|        |        |      | 2,0  | 0,078  | 42,0001,6471,10 |
|        |        |      | 2,4  | 0,095  | 42,0001,6472,10 |
|        |        |      | 2,8  | 0,110  | 42,0001,4642,10 |

| M6 | CuCrZr | 3 Nm | Ø mm | Ø inch | Part No.        |
|----|--------|------|------|--------|-----------------|
|    |        |      | 0,8  | 0,030  | 42,0001,6525,10 |
|    |        |      | 1,0  | 0,040  | 42,0001,6526,10 |
|    |        |      | 1,2  | 0,045  | 42,0001,6528,10 |
|    |        |      | 1,6  | 0,062  | 42,0001,6523,10 |
|    |        |      |      |        |                 |
|    |        |      |      |        |                 |
|    |        |      |      |        |                 |
|    |        |      |      |        |                 |
|    |        |      |      |        |                 |
|    |        |      |      |        |                 |

| M8x1,5 | CuCrZr | 5 Nm | Ø mm | Ø inch | Part No.        |
|--------|--------|------|------|--------|-----------------|
|        |        |      | 0,8  | 0,030  | 42,0001,6537,10 |
|        |        |      | 1,0  | 0,040  | 42,0001,4750,10 |
|        |        |      | 1,2  | 0,045  | 42,0001,4751,10 |
|        |        |      | 1,6  | 0,062  | 42,0001,4752,10 |
|        |        |      |      |        |                 |
|        |        |      |      |        |                 |
|        |        |      |      |        |                 |
|        |        |      |      |        |                 |
|        |        |      |      |        |                 |
|        |        |      |      |        |                 |

| M6 | E-Cu | 3 Nm | Ø mm | Ø inch | Part No.        |
|----|------|------|------|--------|-----------------|
|    |      |      | 0,9  | 0,035  | 42,0001,7025,10 |
|    |      |      | 1,0  | 0,040  | 42,0001,7026,10 |
|    |      |      | 1,2  | 0,045  | 42,0001,7027,10 |
|    |      |      |      |        |                 |
|    |      |      |      |        |                 |
|    |      |      |      |        |                 |
|    |      |      |      |        |                 |
|    |      |      |      |        |                 |
|    |      |      |      |        |                 |
|    |      |      |      |        |                 |

| M8x1,5 | E-Cu | 5 Nm | Ø mm | Ø inch | Part No.        |
|--------|------|------|------|--------|-----------------|
|        |      |      | 0,9  | 0,035  | 42,0001,7028,10 |
|        |      |      | 1,0  | 0,040  | 42,0001,7029,10 |
|        |      |      | 1,2  | 0,045  | 42,0001,7030,10 |
|        |      |      |      |        |                 |
|        |      |      |      |        |                 |
|        |      |      |      |        |                 |
|        |      |      |      |        |                 |
|        |      |      |      |        |                 |
|        |      |      |      |        |                 |
|        |      |      |      |        |                 |

# MTW 400i /FSC/3.5m/45°/LED (4,035,951)

**TAB. 2**    gas nozzle

| d1 |      | d2 |      | d3   |      | L  |      | Part No.     |  |
|----|------|----|------|------|------|----|------|--------------|-------------------------------------------------------------------------------------|
| mm | inch | mm | inch | mm   | inch | mm | inch |              |                                                                                     |
| 13 | 0.51 | 25 | 0.98 | 16,4 | 0.64 | 59 | 2.32 | 42,0001,4085 |                                                                                     |
| 15 | 0.59 | 25 | 0.98 | 18,6 | 0.73 | 59 | 2.32 | 42,0001,4048 |                                                                                     |
| 13 | 0.51 | 25 | 0.98 | 16,4 | 0.64 | 61 | 2.40 | 42,0001,4086 |                                                                                     |
| 15 | 0.59 | 25 | 0.98 | 18,1 | 0.71 | 61 | 2.40 | 42,0001,4474 |                                                                                     |
| 15 | 0.59 | 27 | 1.06 | 20,2 | 0.80 | 61 | 2.40 | 42,0001,4789 |                                                                                     |
| 17 | 0.71 | 25 | 0.98 | 20,8 | 0.82 | 61 | 2.40 | 42,0001,4476 |                                                                                     |
| 13 | 0.51 | 25 | 0.98 | 16,4 | 0.64 | 63 | 2.48 | 42,0001,4497 | AI                                                                                  |
| 13 | 0.51 | 25 | 0.98 | 16,4 | 0.64 | 63 | 2.48 | 42,0001,4080 |                                                                                     |
| 15 | 0.59 | 25 | 0.98 | 18,6 | 0.73 | 61 | 2.40 | 42,0001,4496 | AI                                                                                  |
| 15 | 0.59 | 25 | 0.98 | 18,6 | 0.73 | 63 | 2.48 | 42,0001,4051 |                                                                                     |
| 17 | 0.71 | 25 | 0.98 | 20,8 | 0.82 | 61 | 2.40 | 42,0001,4494 | AI                                                                                  |
| 17 | 0.71 | 25 | 0.98 | 20,8 | 0.82 | 63 | 2.48 | 42,0001,4050 |                                                                                     |
| 17 | 0.71 | 27 | 1.06 | 20,8 | 0.82 | 63 | 2.48 | 42,0001,4216 |                                                                                     |
| 21 | 0.82 | 25 | 0.98 | 25,0 | 0.98 | 63 | 2.48 | 42,0001,4054 |                                                                                     |
| 15 | 0.59 | 25 | 0.98 | 18,6 | 0.73 | 68 | 2.68 | 42,0001,4052 |                                                                                     |
| 17 | 0.71 | 25 | 0.98 | 20,8 | 0.82 | 68 | 2.68 | 42,0001,4049 |                                                                                     |
|    |      |    |      |      |      |    |      |              |                                                                                     |
|    |      |    |      |      |      |    |      |              |                                                                                     |


| TAB. 11 gas nozzle                                                                |  |      |  |           |  |           |  |           |  |              |  |                 |                                                                                     |
|-----------------------------------------------------------------------------------|--|------|--|-----------|--|-----------|--|-----------|--|--------------|--|-----------------|-------------------------------------------------------------------------------------|
|  |  |      |  | <b>d1</b> |  | <b>d2</b> |  | <b>d3</b> |  | <b>L</b>     |  | <b>Part No.</b> |  |
| mm                                                                                |  | inch |  | mm        |  | inch      |  | mm        |  | inch         |  |                 |                                                                                     |
| 13                                                                                |  | 0.51 |  | ø25 0.98  |  | 16 0.63   |  | 62,5 2.46 |  | 42,0001,4917 |  |                 |                                                                                     |
| 10                                                                                |  | 0.39 |  | ø25 0.98  |  | 16 0.63   |  | 68,0 2.68 |  | 42,0001,6715 |  |                 |                                                                                     |
| 13                                                                                |  | 0.51 |  | ø25 0.98  |  | 16 0.63   |  | 68,0 2.68 |  | 42,0001,6716 |  |                 |                                                                                     |
|                                                                                   |  |      |  |           |  |           |  |           |  |              |  |                 |                                                                                     |
|                                                                                   |  |      |  |           |  |           |  |           |  |              |  |                 |                                                                                     |


| TAB. 12 gas nozzle                                                                  |  |  |           |      |           |      |           |      |          |      |                 |                                                                                       |
|-------------------------------------------------------------------------------------|--|--|-----------|------|-----------|------|-----------|------|----------|------|-----------------|---------------------------------------------------------------------------------------|
|  |  |  | <b>d1</b> |      | <b>d2</b> |      | <b>d3</b> |      | <b>L</b> |      | <b>Part No.</b> |  |
|                                                                                     |  |  | mm        | inch | mm        | inch | mm        | inch | mm       | inch |                 |                                                                                       |
|                                                                                     |  |  | 15        | 0.59 | ø25       | 0.98 | 18,6      | 0.73 | 61       | 2.40 | 44,0350,3935    |                                                                                       |
|                                                                                     |  |  | 17        | 0.66 | ø25       | 0.98 | 20,8      | 0.82 | 61       | 2.40 | 44,0350,3936    |                                                                                       |
|                                                                                     |  |  |           |      |           |      |           |      |          |      |                 |                                                                                       |
|                                                                                     |  |  |           |      |           |      |           |      |          |      |                 |                                                                                       |



# MTW 400i /FSC/3.5m/45°/LED (4,035,951)

Tab. 3

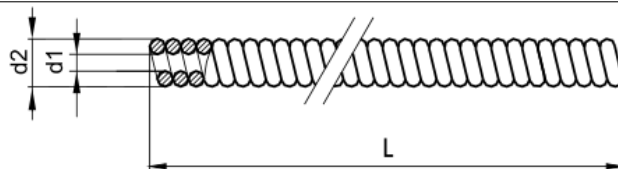




| material           |  |           | d1  |      | d2  |      | Part No.<br>L    |          | Part No.<br>L    |          | Part No.<br>L    |         |
|--------------------|-----------------------------------------------------------------------------------|-----------|-----|------|-----|------|------------------|----------|------------------|----------|------------------|---------|
|                    | Ø mm                                                                              | Ø inch    | mm  | inch | mm  | inch | 5m               | 16.4feet | 15m              | 49.2feet | 50m              | 160feet |
| Steel liner        | 0,8                                                                               | .030      | 1,4 | .055 | 4,4 | .176 | 40,0002,0040,005 |          | 40,0002,0040,015 |          | 40,0002,0040,050 |         |
| Steel liner        | 0,9-1,0                                                                           | .035/.040 | 1,6 | .062 | 4,8 | .189 | 40,0002,0041,005 |          | 40,0002,0041,015 |          | 40,0002,0041,050 |         |
| Steel liner        | 1,2                                                                               | .045      | 1,9 | .074 | 4,9 | .192 | 40,0002,0042,005 |          | 40,0002,0042,015 |          | 40,0002,0042,050 |         |
| Steel liner        | 1,4-1,6                                                                           | .052/.062 | 2,5 | .098 | 4,9 | .192 | 40,0002,0043,005 |          | 40,0002,0043,015 |          | 40,0002,0043,050 |         |
| CrNi liner         | 0,8                                                                               | .030      | 1,4 | .055 | 4,4 | .176 | 40,0002,0044,005 |          | 40,0002,0044,015 |          | 40,0002,0044,050 |         |
| CrNi liner         | 0,9-1,0                                                                           | .035/.040 | 1,6 | .062 | 4,8 | .189 | 40,0002,0045,005 |          | 40,0002,0045,015 |          | 40,0002,0045,050 |         |
| CrNi liner         | 1,2                                                                               | .045      | 1,9 | .074 | 4,9 | .192 | 40,0002,0046,005 |          | 40,0002,0046,015 |          | 40,0002,0046,050 |         |
| CrNi liner         | 1,4-1,6                                                                           | .052/.062 | 2,5 | .098 | 4,9 | .192 | 40,0002,0047,005 |          | 40,0002,0047,015 |          | 40,0002,0047,050 |         |
| Steel liner coated | 0,8                                                                               | .030      | 1,4 | .055 | 4,4 | .176 | 40,0002,0052,005 |          | 40,0002,0052,015 |          | 40,0002,0052,050 |         |
| Steel liner coated | 0,9-1,0                                                                           | .035/.040 | 1,6 | .062 | 4,8 | .189 | 40,0002,0053,005 |          | 40,0002,0053,015 |          | 40,0002,0053,050 |         |
| Steel liner coated | 1,2                                                                               | .045      | 1,9 | .074 | 4,9 | .192 | 40,0002,0054,005 |          | 40,0002,0054,015 |          | 40,0002,0054,050 |         |
| Steel liner coated | 1,4-1,6                                                                           | .052/.062 | 2,5 | .098 | 4,9 | .192 | 40,0002,0055,005 |          | 40,0002,0055,015 |          | 40,0002,0055,050 |         |


Tab. 3

## combi liner W AL

## combi liner G AL




## combi inner liner G

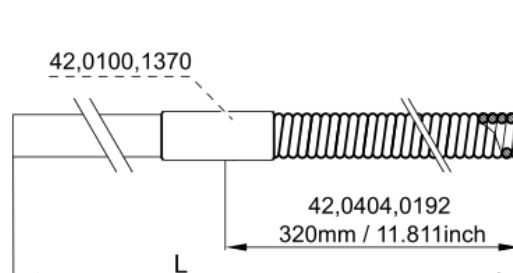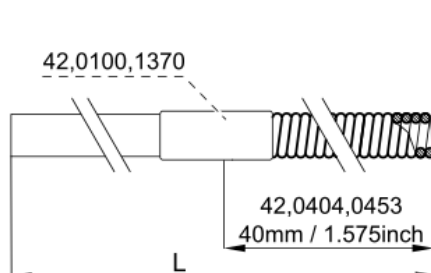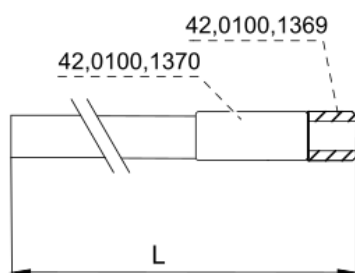

|  |           | L   |      | d1  |      | d2  |      | combi liner<br>W AL | combi liner<br>G AL | combi inner<br>liner G |
|-------------------------------------------------------------------------------------|-----------|-----|------|-----|------|-----|------|---------------------|---------------------|------------------------|
| Ø mm                                                                                | Ø inch    | m   | feet | mm  | inch | mm  | inch | Part No.            | Part No.            | Part No.               |
| 0,8                                                                                 | .030      | 2,0 | 6.5  | 1,2 | .059 | 4,7 | .185 | 44,0350,3388        | 44,0350,3400        | 44,0350,5550           |
| 0,8                                                                                 | .030      | 3,8 | 12.4 | 1,2 | .059 | 4,7 | .185 | 44,0350,3392        | 44,0350,3404        | 44,0350,5513           |
| 0,8                                                                                 | .030      | 4,8 | 15.7 | 1,2 | .059 | 4,7 | .185 | 44,0350,3396        | 44,0350,3408        | 44,0350,5518           |
| 0,9-1,0                                                                             | .035/.040 | 2,0 | 6.5  | 1,5 | .062 | 4,7 | .185 | 44,0350,3389        | 44,0350,3401        | 44,0350,5551           |
| 0,9-1,0                                                                             | .035/.040 | 3,8 | 12.4 | 1,5 | .062 | 4,7 | .185 | 44,0350,3393        | 44,0350,3405        | 44,0350,5514           |
| 0,9-1,0                                                                             | .035/.040 | 4,8 | 15.7 | 1,5 | .062 | 4,7 | .185 | 44,0350,3397        | 44,0350,3409        | 44,0350,5519           |
| 1,2                                                                                 | .045      | 2,0 | 6.5  | 1,8 | 0.74 | 4,7 | .185 | 44,0350,3390        | 44,0350,3402        | 44,0350,5552           |
| 1,2                                                                                 | .045      | 3,8 | 12.4 | 1,8 | 0.74 | 4,7 | .185 | 44,0350,3394        | 44,0350,3406        | 44,0350,5515           |
| 1,2                                                                                 | .045      | 4,8 | 15.7 | 1,8 | 0.74 | 4,7 | .185 | 44,0350,3398        | 44,0350,3410        | 44,0350,5520           |
| 1,4-1,6                                                                             | .052/.062 | 2,0 | 6.5  | 2,4 | .098 | 4,7 | .185 | 44,0350,3391        | 44,0350,3403        | 44,0350,5553           |
| 1,4-1,6                                                                             | .052/.062 | 3,8 | 12.4 | 2,4 | .098 | 4,7 | .185 | 44,0350,3395        | 44,0350,3407        | 44,0350,5516           |
| 1,4-1,6                                                                             | .052/.062 | 4,8 | 15.7 | 2,4 | .098 | 4,7 | .185 | 44,0350,3399        | 44,0350,3411        | 44,0350,5521           |
| 2,0                                                                                 | .045      | 2,0 | 6.5  | 1,2 | .059 | 4,7 | .185 | 44,0350,3615        | 44,0350,3618        | 44,0350,5554           |
| 2,0                                                                                 | .045      | 3,8 | 12.4 | 3,0 | .118 | 4,7 | .185 | 44,0350,3616        | 44,0350,3619        | 44,0350,5517           |
| 2,0                                                                                 | .045      | 4,8 | 15.7 | 3,0 | .118 | 4,7 | .185 | 44,0350,3617        | 44,0350,3620        | 44,0350,5522           |

# MTW 400i /FSC/3.5m/45°/LED (4,035,951)


**TAB. 4** clamping piece

| <br>Ø mm    Ø inch |      | Fe / CrNi    | Alu / CuSi   | colour |                                                                                                   |
|-----------------------------------------------------------------------------------------------------|------|--------------|--------------|--------|---------------------------------------------------------------------------------------------------|
| 0,8                                                                                                 | .031 |              | 44,0350,3314 | grey   |                |
| 0,8                                                                                                 | .031 | 44,0350,3315 |              | grey   |                                                                                                   |
| 0,9-1,0                                                                                             | .039 | 44,0350,3317 |              | blue   |                |
| 1,2                                                                                                 | .047 | 44,0350,3318 |              | red    |                                                                                                   |
| 1,4-1,6                                                                                             | .062 | 44,0350,3320 |              | black  |                                                                                                   |
| 2,0                                                                                                 | .078 |              | 44,0350,3321 | green  |                                                                                                   |
| 2,4                                                                                                 | .095 |              | 44,0350,4245 | brown  | <br>only stuck |
| 2,0                                                                                                 | .078 | 42,0001,4589 |              |        |                                                                                                   |
| 2,4                                                                                                 | .095 |              |              |        |                                                                                                   |
| 2,8                                                                                                 | .110 |              |              |        |                                                                                                   |



# MTW 400i /FSC/3.5m/45°/LED (4,035,951)

## basic kits

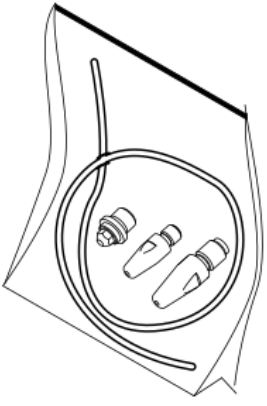
|  | Ø mm | Ø inch | m   | feet | Fe<br>MTG / MTW<br>Part No. | CrNi<br>MTG / MTW<br>Part No. | Alu<br>MTW<br>Part No. | CuSi<br>MTW<br>Part No. | Alu/CuSi<br>MTG<br>Part No. |
|----------------------------------------------------------------------------------|------|--------|-----|------|-----------------------------|-------------------------------|------------------------|-------------------------|-----------------------------|
|                                                                                  | 0,6  | .023   | 5,0 | 11.5 | 44,0350,5296                | X                             | X                      |                         | X                           |
|                                                                                  | 0,8  | .030   | 5,0 | 11.5 | 44,0350,5117                | 44,0350,5158                  | 44,0350,5135           |                         | 44,0350,5144                |
|                                                                                  | 0,9  | .035   | 5,0 | 14.8 | 44,0350,5118                | 44,0350,5159                  | 44,0350,5136           |                         | 44,0350,5145                |
|                                                                                  | 1,0  | .040   | 5,0 | 11.5 | 44,0350,5119                | 44,0350,5160                  | 44,0350,5137           |                         | 44,0350,5146                |
|                                                                                  | 1,2  | .047   | 5,0 | 14.8 | 44,0350,5120                | 44,0350,5161                  | 44,0350,5138           |                         | 44,0350,5147                |
|                                                                                  | 1,4  | .052   | 5,0 | 11.5 | 44,0350,5121                | 44,0350,5162                  | 44,0350,5139           |                         | 44,0350,5148                |
|                                                                                  | 1,6  | .062   | 5,0 | 14.8 | 44,0350,5122                | 44,0350,5163                  | 44,0350,5140           |                         | 44,0350,5149                |
|                                                                                  | 2,0  | .078   | 5,0 | 14.8 | X                           | X                             | 44,0350,5141           |                         | X                           |

# MTW 400i /FSC/3.5m/45°/LED (4,035,951)


## TOOLS

### contact tip + nozzle stock


42,0201,3216



### nozzle stock
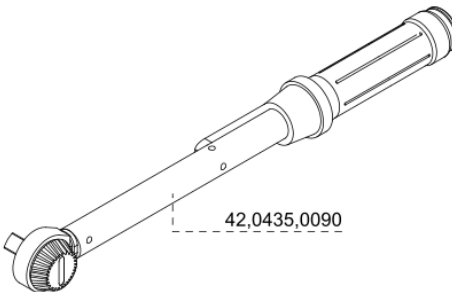
| nozzle stock                                                                                     | socket       | torque                                                                                   | torque wrench 5-25 Nm                                                                                    |
|--------------------------------------------------------------------------------------------------|--------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| 42,0001,4037  | 42,0435,0236 | 8 Nm  |  <p>42,0435,0090</p> |
| 44,0350,3426  | 42,0435,0236 | 8 Nm  |                                                                                                          |
| 42,0001,4919  | 42,0435,0233 | 8 Nm  |                                                                                                          |
| 42,0001,4651  | 42,0435,0233 | 8 Nm  |                                                                                                          |

### contact tip

| contact tip                                                                                | torque wrench | torque                                                                                   | torque driver                                                                                            |
|--------------------------------------------------------------------------------------------|---------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| M6      | 42,0001,6774  | 3 Nm  |  <p>42,0411,0013</p> |
| M8x1,5  | 42,0001,6775  | 5 Nm  |                                                                                                          |

## MTW 400i /FSC/3.5m/45°/LED (4,035,951)

| Article no.          | Description                    | Quantity | Unit |
|----------------------|--------------------------------|----------|------|
| 42,0407,0284         | HOSE CLAMP 1EAR 9,0/ø7,3-9,0   | 1        | pc   |
| 42,0405,0548         | Sealing cap for plug nipple    | 1        | pc   |
| 42,0402,0258         | O-ring 4x1.2mm FKM             | 1        | pc   |
| 42,0407,0245         | CLAMP W.INSERT 7,0/ø5,8-7,9    | 1        | pc   |
| 42,0402,0286         | O-ring ø7.5x1.5mm NBR70        | 1        | pc   |
| 42,0407,0100         | CABLE FIXING 150               | 1        | pc   |
| 42,0407,0101         | CABLE FIXING 204               | 1        | pc   |
| 44,0450,1436         | Extract. tool CPC+35mm extens. | 1        | pc   |
| 44,0350,3440         | Wiref. hose 5.7x1.15 3.25m     | 1        | pc   |
| 42,0405,0753         | Heat shield PA6 ø18mm          | 1        | pc   |
| 42,0100,1329         | Insulating ring W ø20.8/14*7.3 | 1        | pc   |
| 42,0001,4037         | Nozz.stock M8x1.5/SW13x26.5 CU | 1        | pc   |
| 42,0405,0854         | Spatter guard Ø10/Ø20.8x24mm   | 1        | pc   |
| 42,0100,1156         | Spatter guard ø14,5/ø18x21,3   | 1        | pc   |
| 42,0001,6336         | Clamping nut Contec/SW11x19,5  | 1        | pc   |
| 44,0350,3426         | Contec MD nozzle fitt. MTW500i | 1        | pc   |
| 42,0100,1371         | Insulation ring Ø20.8/Ø14x8.5  | 1        | pc   |
| 42,0100,0591         | Spatter guard Ø10/Ø20.8x24mmHD | 1        | pc   |
| 42,0001,4651         | Nozzle fit.M8x1.5/SW10x26.5 CU | 1        | pc   |
| 42,0100,1497         | Insulation ring ø20.7/ø14x15   | 1        | pc   |
| 42,0001,4919         | Nozzle fitting M6/SW10x30 CU   | 1        | pc   |
| 42,0402,0317         | O-ring lø20x1.3 FKM            | 1        | pc   |
| 42,0001,4051         | Gas nozzle ø15/ø25x63 CT       | 1        | pc   |
| 42,0001,4917         | Gas noz. narrow Ø13/Ø25x62.5   | 1        | pc   |
| 44,0350,3935         | Gas nozzle Ø15/Ø25x61 CT/H     | 1        | pc   |
| 42,0001,3912<br>,100 | Contec-Shell 100 pcs MD        | 1        | pk   |
| 42,0001,3912<br>,10  | Contec-Shell 10 pcs MD         | 1        | pk   |
| 42,0001,6525<br>,10  | Contact tip 0,8 / M6 / 8x24mm  | 1        | pk   |
| 42,0001,6526<br>,10  | Contact tip 1,0 / M6 / 8x24mm  | 1        | pk   |
| 42,0001,6528<br>,10  | Contact tip 1,2 / M6 / 8x24mm  | 1        | pk   |
| 42,0001,6523<br>,10  | Contact tip 1,6 / M6 / 8x24mm  | 1        | pk   |

## MTW 400i /FSC/3.5m/45°/LED (4,035,951)

| Article no.         | Description                    | Quantity | Unit |
|---------------------|--------------------------------|----------|------|
| 42,0001,6482<br>,10 | Contact tip 0,7/M8x1,5/10x32mm | 1        | pk   |
| 42,0001,6464<br>,10 | Contact tip 0,8/M8x1,5/ø10x32  | 1        | pk   |
| 42,0001,6465<br>,10 | Contact tip 0,9/M8x1,5/ø10x32  | 1        | pk   |
| 42,0001,6466<br>,10 | Contact tip 1,0/M8x1,5/ø10x32  | 1        | pk   |
| 42,0001,6483<br>,10 | Contact tip 1,1/M8x1,5/10x32mm | 1        | pk   |
| 42,0001,6467<br>,10 | Contact tip 1,2/M8x1,5/ø10x32  | 1        | pk   |
| 42,0001,6484<br>,10 | Contact tip 1,3/M8x1,5/10x32mm | 1        | pk   |
| 42,0001,6468<br>,10 | Contact tip 1,4/M8x1,5/ø10x32  | 1        | pk   |
| 42,0001,6485<br>,10 | Contact tip 1,5/M8x1,5/10x32mm | 1        | pk   |
| 42,0001,6469<br>,10 | Contact tip 1,6/M8x1,5/ø10x32  | 1        | pk   |
| 42,0001,6470<br>,10 | Contact tip 1,8/M8x1,5/ø10x32  | 1        | pk   |
| 42,0001,6471<br>,10 | Contact tip 2,0/M8x1,5/ø10x32  | 1        | pk   |
| 42,0001,6472<br>,10 | Contact tip 2,4/M8x1,5/ø10x32  | 1        | pk   |
| 42,0001,4642<br>,10 | Contact tip 2.8/M8x1.5/ø10x32  | 1        | pk   |
| 42,0001,6537<br>,10 | Cont. tip 0.8/M8x1.5/10x32 Al  | 1        | pk   |
| 42,0001,4750<br>,10 | Cont. tip 1.0/M8x1.5/ø10x32 Al | 1        | pk   |
| 42,0001,4751<br>,10 | Cont. tip 1.2/M8x1.5/ø10x32 Al | 1        | pk   |
| 42,0001,4752<br>,10 | Cont. tip 1.6/M8x1.5/ø10x32 Al | 1        | pk   |
| 42,0001,4928        | Contact tip 0.6/M6/8x24mm      | 1        | pc   |
| 42,0001,6524<br>,10 | Contact tip 0,7 / M6 / 8x24mm  | 1        | pk   |
| 42,0001,4461<br>,10 | Contact tip 0,8/M6/ø8x24       | 1        | pk   |
| 42,0001,4462        | Contact tip 0,9/M6/ø8x24       | 1        | pk   |

## MTW 400i /FSC/3.5m/45°/LED (4,035,951)

| Article no.  | Description                    | Quantity | Unit |
|--------------|--------------------------------|----------|------|
| ,10          |                                |          |      |
| 42,0001,4463 | Contact tip 1,0/M6/ø8x24       | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,6527 | Contact tip 1,1 / M6 / 8x24mm  | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,4464 | Contact tip 1,2/M6/ø8x24       | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,6529 | Contact tip 1,3 / M6 / 8x24mm  | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,4465 | Contact tip 1,4/M6/ø8x24       | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,6522 | Contact tip 1,5 / M6 / 8x24mm  | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,4466 | Contact tip 1,6/M6/ø8x24       | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,7025 | Contact tip 0.9/M6/ø8x24/SQ    | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,7026 | Contact tip 1.0/M6/ø8x24/SQ    | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,7027 | Contact tip 1.2/M6/ø8x24/SQ    | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,7028 | Cont. tip 0.9/M8x1.5/ø10x32/SQ | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,7029 | Cont. tip 1.0/M8x1.5/ø10x32/SQ | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,7030 | Cont. tip 1.2/M8x1.5/ø10x32/SQ | 1        | pk   |
| ,10          |                                |          |      |
| 42,0001,4085 | Gas nozzle ø13/ø25x59 CT       | 1        | pc   |
| 42,0001,4048 | Gas nozzle ø15/ø25x59 CT       | 1        | pc   |
| 42,0001,4086 | Gas nozzle ø13/ø25x61.5 CT     | 1        | pc   |
| 42,0001,4474 | Gas nozzle ø15/ø25x61 CT       | 1        | pc   |
| 42,0001,4789 | Gas nozzle ø15/ø27x61 CT HD    | 1        | pc   |
| 42,0001,4476 | Gas nozzle ø17/ø25x61 CT       | 1        | pc   |
| 42,0001,4497 | Gas nozzle ø13/ø25x61 CT/C     | 1        | pc   |
| 42,0001,4080 | Gas nozzle ø13/ø25x63 CT       | 1        | pc   |
| 42,0001,4496 | Gas nozzle ø15/ø25x61 CT/C     | 1        | pc   |
| 42,0001,4494 | Gas nozzle ø17/ø25x61 CT/C     | 1        | pc   |
| 42,0001,4050 | Gas nozzle ø17/ø25x63 CT       | 1        | pc   |
| 42,0001,4216 | Gas nozzle Ø17/Ø27x63 CT HD    | 1        | pc   |
| 42,0001,4054 | Gas nozzle cyl ø21.1/ø25x63 CT | 1        | pc   |

## MTW 400i /FSC/3.5m/45°/LED (4,035,951)

| Article no.  | Description                    | Quantity | Unit |
|--------------|--------------------------------|----------|------|
| 42,0001,4052 | Gas nozzle ø15/ø25x68 CT       | 1        | pc   |
| 42,0001,4049 | Gas nozzle ø17/ø25x68 CT       | 1        | pc   |
| 42,0001,6715 | Gas nz. nar. gap Ø10/Ø25x68 CT | 1        | pc   |
| 42,0001,6716 | Gas nz. nar. gap Ø13/Ø25x68 CT | 1        | pc   |
| 44,0350,3936 | Gas nozzle ø17/ø25x61 CT/H     | 1        | pc   |
| 44,0350,3410 | Combi liner G Al /1.2/4.8m     | 1        | pc   |
| 44,0350,3403 | Combi liner G Al /1.6/2.0m     | 1        | pc   |
| 44,0350,3407 | Combi liner G Al /1.6/3.8m     | 1        | pc   |
| 44,0350,3411 | Combi liner G Al /1.6/4.8m     | 1        | pc   |
| 44,0350,3405 | Combi liner G Al /1.0/3.8m     | 1        | pc   |
| 44,0350,3409 | Combi liner G Al /1.0/4.8m     | 1        | pc   |
| 44,0350,3402 | Combi liner G Al /1.2/2.0m     | 1        | pc   |
| 44,0350,3406 | Combi liner G Al 1.2/3.8m      | 1        | pc   |
| 44,0350,3620 | Combi liner G Al /2.0/4.8m     | 1        | pc   |
| 44,0350,3619 | Combi liner G Al /2.0/3.8m     | 1        | pc   |
| 44,0350,3400 | Combi liner G Al /0.8/2.0m     | 1        | pc   |
| 44,0350,3404 | Combi liner G Al /0.8/3.8m     | 1        | pc   |
| 44,0350,3408 | Combi liner G Al /0.8/4.8m     | 1        | pc   |
| 44,0350,3401 | Combi liner G Al /1.0/2.0m     | 1        | pc   |
| 44,0350,5520 | Combination liner G /1.2/4.8m  | 1        | pc   |
| 44,0350,5516 | Combination liner G /1.6/3.8m  | 1        | pc   |
| 44,0350,5521 | Combination liner G /1.6/4.8m  | 1        | pc   |
| 44,0350,5514 | Combination liner G /1.0/3.8m  | 1        | pc   |
| 44,0350,5519 | Combination liner G /1.0/4.8m  | 1        | pc   |
| 44,0350,5515 | Combination liner G /1.2/3.8m  | 1        | pc   |
| 44,0350,5517 | Combination liner G /2.0/3.8m  | 1        | pc   |
| 44,0350,5513 | Combination liner G /0.8/3.8m  | 1        | pc   |
| 44,0350,5518 | Combination liner G /0.8/4.8m  | 1        | pc   |
| 42,0404,0453 | Bronze liner 2.7x1.0x40mm      | 1        | pc   |
| 42,0404,0192 | Bronze inner liner 2,7x1 0,32m | 1        | pc   |
| 42,0100,1370 | Connector uni. to liner        | 1        | pc   |
| 42,0100,1369 | Outlet part to liner MAG02     | 1        | pc   |
| 44,0350,3392 | Combi liner W Al /0.8/3.8m     | 1        | pc   |
| 44,0350,3396 | Combi liner W Al /0.8/4.8m     | 1        | pc   |

## MTW 400i /FSC/3.5m/45°/LED (4,035,951)

| Article no.          | Description                    | Quantity | Unit |
|----------------------|--------------------------------|----------|------|
| 44,0350,3393         | Combi liner W Al /1.0/3.8m     | 1        | pc   |
| 44,0350,3397         | Combi liner W Al /1.0/4.8m     | 1        | pc   |
| 44,0350,3394         | Combi liner W Al /1.2/3.8m     | 1        | pc   |
| 44,0350,3398         | Combi liner W Al /1.2/4.8m     | 1        | pc   |
| 44,0350,3395         | Combi liner W Al /1.6/3.8m     | 1        | pc   |
| 44,0350,3399         | Combi liner W Al /1.6/4.8m     | 1        | pc   |
| 44,0350,3616         | Combi liner W Al /2.0/3.8m     | 1        | pc   |
| 44,0350,3617         | Combi liner W Al /2.0/4.8m     | 1        | pc   |
| 40,0002,0040<br>,015 | Steel liner exposed 0.8/15m    | 1        | pc   |
| 40,0002,0041<br>,015 | Steel liner exposed 1.0 / 15m  | 1        | pc   |
| 40,0002,0042<br>,015 | Steel liner exposed 1.2/15m    | 1        | pc   |
| 40,0002,0043<br>,015 | Steel liner exposed 1.6/15m    | 1        | pc   |
| 40,0002,0044<br>,015 | CrNi liner exposed 0.8/15m     | 1        | pc   |
| 40,0002,0045<br>,015 | CrNi liner exposed 1.0/15m     | 1        | pc   |
| 40,0002,0046<br>,015 | CrNi liner exposed 1.2/15m     | 1        | pc   |
| 40,0002,0047<br>,015 | CrNi liner exposed 1.6/15m     | 1        | pc   |
| 40,0002,0052<br>,015 | Steel inner liner C 0.8 / 15 m | 1        | pc   |
| 40,0002,0053<br>,015 | Steel inner liner C 1.0 / 15 m | 1        | pc   |
| 40,0002,0054<br>,015 | Steel inner liner C 1.2 / 15 m | 1        | pc   |
| 40,0002,0055<br>,015 | Steel inner liner C 1.6 / 15 m | 1        | pc   |
| 40,0002,0040<br>,005 | Steel liner exposed 0.8/5m     | 1        | pc   |
| 40,0002,0041<br>,005 | Steel liner exposed 1.0/5m     | 1        | pc   |
| 40,0002,0042<br>,005 | Steel liner exposed 1.2/5m     | 1        | pc   |
| 40,0002,0043<br>,005 | Steel liner exposed 1.6/5m     | 1        | pc   |
| 40,0002,0044         | CrNi liner exposed 0.8/5m      | 1        | pc   |



## MTW 400i /FSC/3.5m/45°/LED (4,035,951)

| Article no.          | Description                    | Quantity | Unit |
|----------------------|--------------------------------|----------|------|
| ,005                 |                                |          |      |
| 40,0002,0045<br>,005 | CrNi liner exposed 1.0/5m      | 1        | pc   |
| 40,0002,0046<br>,005 | CrNi liner exposed 1.2/5m      | 1        | pc   |
| 40,0002,0047<br>,005 | CrNi liner exposed 1.6/5m      | 1        | pc   |
| 40,0002,0052<br>,005 | Steel inner liner C 0.8 / 5 m  | 1        | pc   |
| 40,0002,0053<br>,005 | Steel inner liner C 1.0 / 5 m  | 1        | pc   |
| 40,0002,0054<br>,005 | Steel inner liner C 1.2 / 5 m  | 1        | pc   |
| 40,0002,0055<br>,005 | Steel inner liner C 1.6 / 5 m  | 1        | pc   |
| 40,0002,0040<br>,050 | Steel liner exposed 0.8/50m    | 1        | pc   |
| 40,0002,0041<br>,050 | Steel liner exposed 1.0/50m    | 1        | pc   |
| 40,0002,0042<br>,050 | Steel liner exposed 1.2/50m    | 1        | pc   |
| 40,0002,0043<br>,050 | Steel liner exposed 1.6/50m    | 1        | pc   |
| 40,0002,0044<br>,050 | CrNi liner exposed 0.8/50m     | 1        | pc   |
| 40,0002,0045<br>,050 | CrNi liner exposed 1.0/50m     | 1        | pc   |
| 40,0002,0046<br>,050 | CrNi liner exposed 1.2/50m     | 1        | pc   |
| 40,0002,0047<br>,050 | CrNi liner exposed 1.6/50m     | 1        | pc   |
| 40,0002,0052<br>,050 | Steel inner liner C 0.8 / 50 m | 1        | pc   |
| 40,0002,0053<br>,050 | Steel inner liner C 1.0 / 50 m | 1        | pc   |
| 40,0002,0054<br>,050 | Steel inner liner C 1.2 / 50 m | 1        | pc   |
| 40,0002,0055<br>,050 | Steel inner liner C 1.6 / 50 m | 1        | pc   |
| 44,0350,3388         | Combi liner W Al /0.8/2.0m     | 1        | pc   |
| 44,0350,3389         | Combi liner W Al /1.0/2.0m     | 1        | pc   |
| 44,0350,3390         | Combi liner W Al /1.2/2.0m     | 1        | pc   |

## MTW 400i /FSC/3.5m/45°/LED (4,035,951)

| Article no.  | Description                    | Quantity | Unit |
|--------------|--------------------------------|----------|------|
| 44,0350,3391 | Combi liner W Al /1.6/2.0m     | 1        | pc   |
| 44,0350,5550 | Kombiseele G /0,8/2,0m         | 1        | pc   |
| 44,0350,5552 | Kombiseele G /1,2/2,0m         | 1        | pc   |
| 44,0350,5553 | Kombiseele G /1,6/2,0m         | 1        | pc   |
| 44,0350,5522 | Combination liner G /2.0/4.8m  | 1        | pc   |
| 44,0350,5554 | Kombiseele G /2,0/2,0m         | 1        | pc   |
| 44,0350,3615 | Combi liner W Al /2.0/2.0m     | 1        | pc   |
| 44,0350,3618 | Combi liner G Al /2.0/2.0m     | 1        | pc   |
| 44,0350,5551 | Kombiseele G /1,0/2,0m         | 1        | pc   |
| 44,0350,3314 | Clamping nipple 0.8 Al / CuSi  | 1        | pc   |
| 44,0350,3315 | Clamping piece 0.8 Fe / CrNi   | 1        | pc   |
| 44,0350,3318 | Clamping piece 1.2             | 1        | pc   |
| 44,0350,3320 | Clamping piece 1.4/1.6         | 1        | pc   |
| 44,0350,3317 | Clamping piece 0.9 / 1.0       | 1        | pc   |
| 44,0350,3321 | Clamping piece 2.0 Al          | 1        | pc   |
| 42,0001,4589 | Clamping piece 2.8 SSFCW       | 1        | pc   |
| 44,0350,4245 | Clamping piece 2.4 Al          | 1        | pc   |
| 44,0350,5144 | BK Al ø0.8 /G CuSi ø0.8 G/W/5m | 1        | pc   |
| 44,0350,5145 | BK Al ø0.9 /G CuSi ø0.9 G/W/5m | 1        | pc   |
| 44,0350,5146 | BK Al ø1.0 /G CuSi ø1.0 G/W/5m | 1        | pc   |
| 44,0350,5147 | BK Al ø1.2 /G CuSi ø1.2 G/W/5m | 1        | pc   |
| 44,0350,5148 | BK Al ø1.4 /G CuSi ø1.4 G/W/5m | 1        | pc   |
| 44,0350,5149 | BK Al ø1.6/G CuSi ø1.6 G/W/5m  | 1        | pc   |
| 44,0350,5135 | BK Al ø0.8 /W/5m               | 1        | pc   |
| 44,0350,5136 | BK Al ø0.9 /W/5m               | 1        | pc   |
| 44,0350,5137 | BK Al ø1.0 /W/5m               | 1        | pc   |
| 44,0350,5138 | BK Al ø1,2 W/5m MTW            | 1        | pc   |
| 44,0350,5139 | BK Al ø1.4 /W/5m               | 1        | pc   |
| 44,0350,5140 | BK Al ø1.6 /W/5m               | 1        | pc   |
| 44,0350,5141 | BK Al ø2.0 /W/5m               | 1        | pc   |
| 44,0350,5163 | BK CrNi ø1.6 /G/W/5m           | 1        | pc   |
| 44,0350,5162 | BK CrNi ø1.4 /G/W/5m           | 1        | pc   |
| 44,0350,5160 | BK CrNi ø1,0 G/W/5m MTG/MTW    | 1        | pc   |
| 44,0350,5161 | BK CrNi ø1,2 G/W/5m MTG/MTW    | 1        | pc   |

## MTW 400i /FSC/3.5m/45°/LED (4,035,951)

| Article no.  | Description                  | Quantity | Unit |
|--------------|------------------------------|----------|------|
| 44,0350,5159 | BK CrNi ø0.9 /G/W/5m         | 1        | pc   |
| 44,0350,5158 | BK CrNi ø0.8 /G/W/5m         | 1        | pc   |
| 44,0350,5296 | BK Fe ø0,6 /G/W/5m           | 1        | pc   |
| 44,0350,5117 | BK Fe ø0.8 /G/W/5m           | 1        | pc   |
| 44,0350,5118 | BK Fe ø0.9 /G/W/5m           | 1        | pc   |
| 44,0350,5119 | BK Fe ø1,0 G/W/5m MTG/MTW Fe | 1        | pc   |
| 44,0350,5120 | BK Fe ø1,2 G/W/5m MTG/MTW Fe | 1        | pc   |
| 44,0350,5121 | BK Fe ø1.4 /G/W/5m           | 1        | pc   |
| 44,0350,5122 | BK Fe ø1.6 /G/W/5m           | 1        | pc   |
| 42,0201,3216 | Multitool TB wear parts      | 1        | pc   |